


ELECTRIC POWERED Lift

Z6034E




Specifications

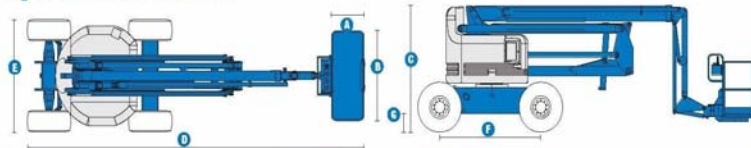

MODEL	Z™-60/34	
MEASUREMENTS	US	Metric
Working height maximum*	66 ft 4 in	20.39 m
Platform height maximum	60 ft 4 in	18.39 m
Horizontal reach maximum	36 ft 3 in	11.05 m
Up and over clearance maximum	27 ft	8.23 m
Platform length - 8 ft / 6 ft model	3 ft / 2 ft 6 in	.91 m / .76 m
Platform width - 8 ft / 6 ft model	8 ft / 6 ft	2.44 m / 1.83 m
Height - stowed	8 ft 10 in	2.69 m
Length - stowed	26 ft 9 in	8.15 m
Width	8 ft 1 in	2.46 m
Wheelbase	8 ft 3 in	2.51 m
Ground clearance - center	1 ft 4 in	.41 m

RANGE OF MOTION Z™-60/34

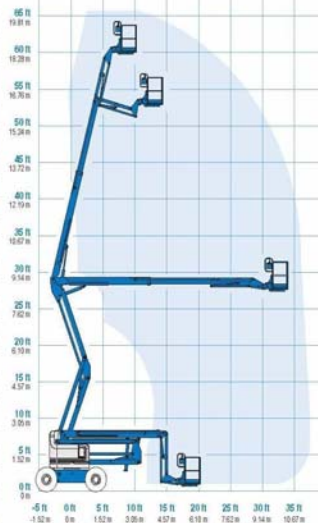

PRODUCTIVITY		
Lift capacity	500 lbs	227 kg
Platform rotation	180°	
Vertical jib rotation	90°	
Turntable rotation	360° continuous	
Turntable tailswing	zero	
Drive speed - stowed	1.8 mph	
Drive speed - raised**	0.88 mph	
Gradeability - ZWD - stowed***	15%	
Gradeability - 4WD - stowed***	25%	
Turning radius - inside	10 ft	3.04 m
Turning radius - outside	19 ft 11 in	6.07 m
Controls	12V DC proportional	
Tires	385/65 D19.5, 12 ply	

POWER

Power source	48V DC Electric Motor 600 Amp hr Battery 600 Amp hr Charger
--------------	---

WEIGHT****

	23,500 lbs
--	------------

Standard Equipment:

- 60 ft 4 in (18.39 m) Platform Height
- Platform Size 3ft x 8 ft
- Lifting Capacity 500 lbs
- Self Leveling Platform
- 48 Volt DC Electric Motor
- 650 Amp hr Battery
- 6ft Jib (1.83 m) Boom
- Fully Proportional Controls
- 360 Continuous Turntable Rotation
- Tilt Alarm
- Horn

MLE
MAN & MATERIAL LIFT ENGINEERING

5707 S. Pennsylvania Avenue
Cudahy, WI 53110
Phone: 414-486-1760
Fax: 414-486-1763
www.manliftengineering.com
sales@manliftengineering.com