
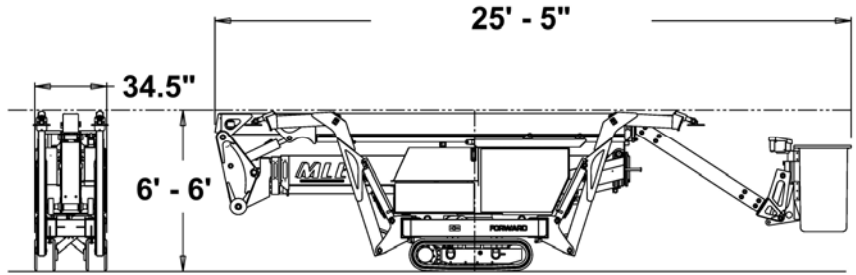


A70TD - 46kV

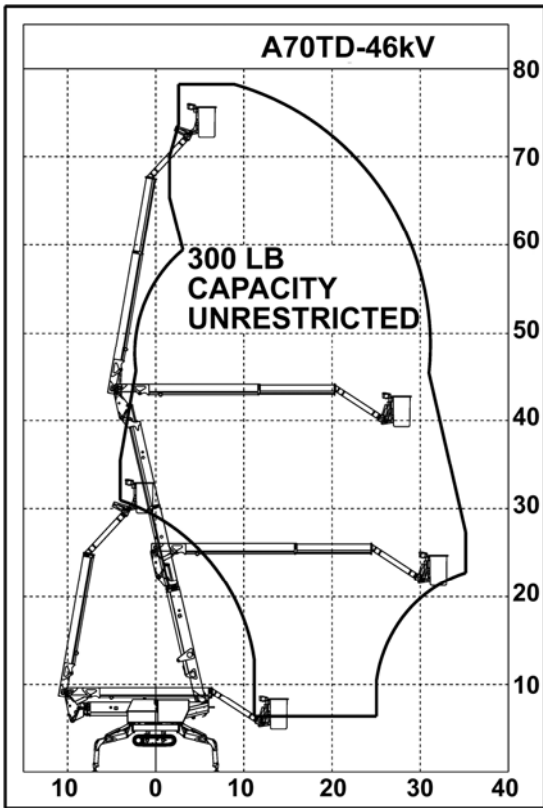

A70TD ATRIUM	U.S.	METRIC
Working Height	78'	23.8 m
Platform Height	72'	21.9 m
Side Reach	35'	10.6 m
Platform Capacity	300#	136 kg
Size of Working Basket	24" x 24" x 42"	.6 x .6 x 1.1 m
Max. Gradability	48%	48%
Drive Angle Forward	Approx. 29%	
Drive Angle Backwards	Approx. 36%	
Drive Side Slope	28%	
Ground Contact Pressure	8 psi	.55 bar
Turret Rotation	360 Non-Cont	
Stowed Length	25' 5"	7.75 m
Stowed Width	34.5"	.88 m
Stowed Height	78"	2.0 m
Outrigger Width	14'x14'	4.26 m x 4.26 m
Proportional 2 Speed Driving Speed	0 - 1.5 mph	0 - 1.6 kph
Weight	7,500 lb	3,402 kg

46kV Electrically Insulated

- 78' Working Height
- Great for power line repair
- Tree maintenance around power lines
- Easy backyard access
- Kubota Diesel Power

SYSTEM CONSISTS OF:

- 5' fiberglass boom tip
- Fiberglass bucket
- Radio controls
- Non-conductive hydraulic hoses
- A92.2 46kV Category "C" Rating

OPTIONAL FEATURES:

- 48 volt battery power
- Bucket liner
- Tree maintenance protection kit

For information call (414) 486-1760
 or visit us online at manliftengineering.com
sales@manliftengineering.com

