

E X S e r i e s

Class 1, Division 1 Hazardous Environment


A30JEX



Reach Specifications	A30JEX
Working Height	36' (10.97 m)
Platform Height	30' (9.14 m)
Up and over Height	13' 1 in (3.99)
Platform Capacity	500 lbs (227kg)
Platform Size	30 x 48" (.76 x 1.22m)
Stowed height	6' 7" (2.01m)
Stowed Length	18' 6" (5.70m)
Jib Range of Articulation	144° (+84,-60) vertical
Articulating Jib	6ft (1.83m)
Horizontal Reach	20' 6" (6.25m)
Overall Width	4' (1.22 m)
Tail Swing	0
Outside Turning Radius 2WS	10' (1.22m)
Inside Turning Radius 2WS	5' (1.52m)
Weight w/Jib Plus	15,800 lb (7,166 kg)
Drive speed	2 mph
Gradeability 2WD	20%
Ground Clearance (Axle)	4" (10cm)
Turret Rotation	360°
Power	48v DC
Platform Rotation	180°
Hydraulic Reservoir	3 gal (11.36L)
Tire Size	7.5 x 10 Non Marking

STANDARD FEATURES:

- 30' Platform Height
- 36' " Working Height
- Horizontal Outreach 20' 6"
- Platform Size 30" X 48"
- Overall Width 4'
- Stowed Height 6' 7"
- Stowed Length 18' 6"
- Ground Clearance 4"
- Hydraulic Controls
- Factory Mutual Certified to NFPA 70 Class 1, Division 1, Group D for Hazardous Environments

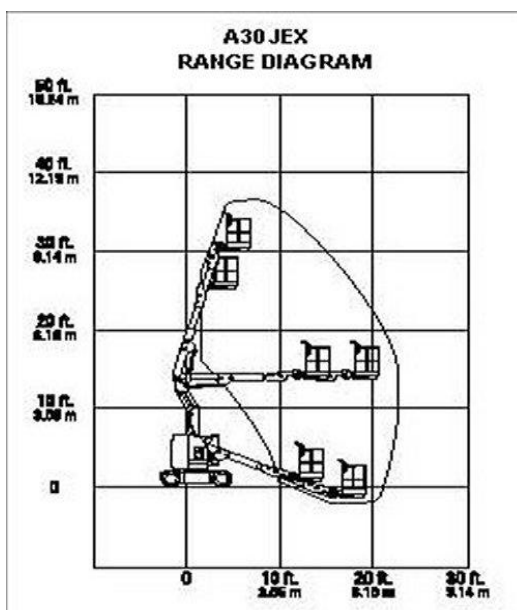

MLE
MAN & MATERIAL LIFT ENGINEERING

5707 S. Pennsylvania Avenue
Cudahy, WI 53110
Phone: 414-486-1760
Fax: 414-486-1763
www.manliftengineering.com
sales@manliftengineering.com